


# ES 3

## 3" Monoblock Deep Well Pumps




- Monoblock pumps for 3" wells
- Maximum liquid temperature: 35°C
- Brass made turbine impeller
- Supplied with 5m round cable and common control box
- Maximum immersion depth: 20 m
- Protection Grade IP68
- Insulation Class B
- Maximum permissible starts per hour: 20 (at regular intervals)
- Oil cooled motor with compensating diaphragm
- Graphite mechanical seal protected by sand proof ring
- All ports are none-toxic and non-polluting
- Shaft and jacket are made by stainless steel
- Outlet is made by brass

### APPLICATIONS

- Pumping clean water into: Detached houses-country houses and farms, cottages
- Moving water in fountains
- Rain irrigation
- Feeding pressure systems
- Filling and emptying tanks
- Water supply

# ES 3

## 3" Monoblock Deep Well Pumps

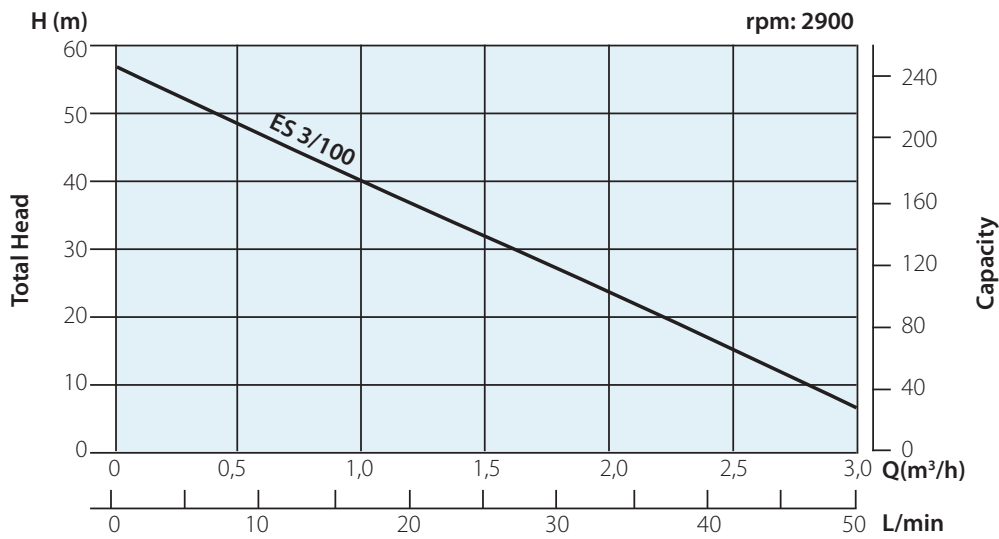

Type Single Phase	P2		1 Ph 230 V			Capacitor		Outlet	l/min Q m³/h	0	0,5	1	1,5	2	2,5	3	Length mm	Weight kg
	kW	HP	A	μF	V	0	8			16	25	33	41	50				
ES 3 / 100	0,75	1	6	25	450	1"	H m	57	48	40	32	25	17	7	589	12		