

GM 500

Plastic Drainage Pumps



Portable submersible pumps of reduced size and weight.

Applications

Drainage of clear water, decorative fountains and so on.

Materials




- Pump body and suction filter in glass loaded polypropilen.
- Impeller in glass loaded polyamide.
- Double lip seal and o'rings in NBR.

Motor

- Asynchronous, two poles.
- IP 68 protection.
- Class F insulation.
- Continuous operation.
- Built-in thermal protection and internal capacitor.

GM 500

Plastic Drainage Pumps

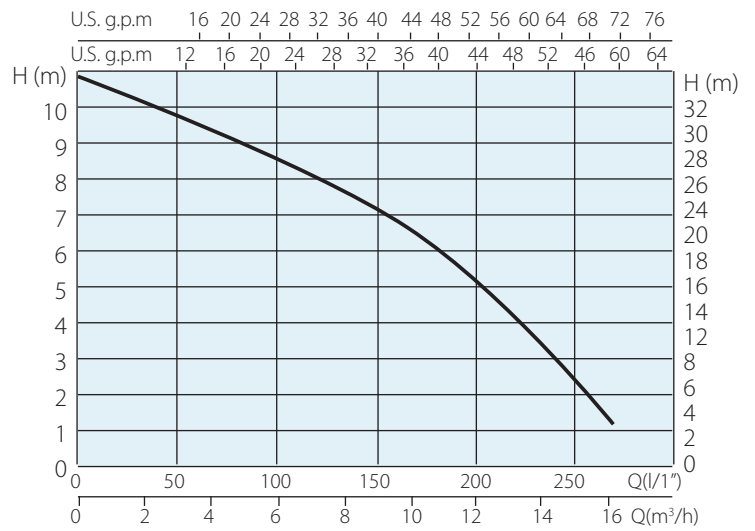

1~230 V	kW/HP	A	B	C	D	E	F	G	H	Kg
GM 500 M	0.6/0.8	443.5	372	405	124	30	213.5	291	201	7.1